
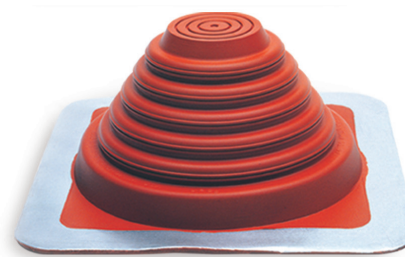


ROOFJACK SQUARE

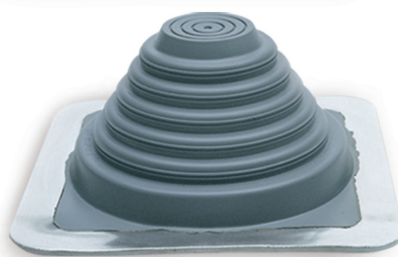

	PIPE SIZE	BASE DIMENSION	COLOR MATERIAL	CARTON QUANTITY	WEIGHT PER CARTON
MINI	1/8"-3/4"	2 - 1/4" (57mm)	Black/Gray EPDM & Red Silicone	15	2.5
#1	1/4"-2-3/4"	4-1/2" (114mm)	Black/Gray EPDM & Red Silicone	15	2.5
#2	7/8"-4"	6" (152mm)	Black/Gray EPDM & Red Silicone	15	4.5
#3	1/4"-5-3/4"	8" (203mm)	Black/Gray EPDM & Red Silicone	15	7.5
#4	2-3/4"-7"	10" (254mm)	Black/Gray EPDM & Red Silicone	10	8.0
#5	4"-8-1/4"	11" (279mm)	Black/Gray EPDM & Red Silicone	10	9.5
#6	4-3/4"-10"	12" (304mm)	Black/Gray EPDM & Red Silicone	10	12.0
#7	5-1/2"-11-1/2"	14" (355mm)	Black/Gray EPDM & Red Silicone	10	15.5
#8	6-3/4"-13-1/2"	17" (431mm)	Black/Gray EPDM & Red Silicone	5	12.8
#9	9-1/2"-20-1/2"	25" (635mm)	Black/Gray EPDM & Red Silicone	5	19.3
MAXI	12"-28-1/2"	34" (863mm)	Black/Gray EPDM & Red Silicone	5	25.6

	EPDM 500	SILICONE
Advanced Ozone Resistance Tested to...	70 hr @500 pphm	70 hr @ 500 pphm
High Temperature Resistance Tested to Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+500°F)
Low Temperature Resistance tested to...	-55°C (-65°F)	-74°C (-100°F)
Tensile Set Maximum...	10MPa (1450psi)	5MPa (700psi)
Compression Set Maximum...	25%	50%

- Manufactured from EPDM or silicone rubber, ROOFJACK is compounded for maximum resistance to ozone, UV light, & temperature extremes.
- Flexible aluminum base will allow the flashing to conform to any metal roof configuration. Pipe location can be centered in the flat of the panel or the rib. Urethane sealant & self-drilling screws complete the installation
- ROOFJACK are well marked so they can easily be cut with shears to fit exactly the pipe size used.
- ROOFJACK are available in Black or Gray EPDM & Red Silicone.
- Square ROOFJACK can be turned so corner is pointing up the roof. It will act as a water diverter.


EASY INSTALLATION



1. Choose pipe opening and trim



2. Slide over pipe



3. Form to roof profile



4. Apply sealant



5. Fasten to complete



www.sealtite.com

6357 Reynolds Road
P.O. Box 4515, Tyler, Texas 75712
800-352-4864 • 800-352-3940 Fax
903-592-2826 • 903-592-1583 Fax

9950 Princeton Glendale Rd.
Cincinnati, OH 45246
800-944-8920 • 800-944-4183 Fax
513-874-5905 • 513-874-5903 Fax